

Analog input board, isolated, 12-bit



also for **PCI**
see page 44



LabVIEW™



LabWindows/CVI™



DASYLab™

Features

- PCI interface to the 32-bit data bus
- Monitoring program for testing and setting the board functions

Analog inputs

- 16 single-ended/8 differential inputs or 8 single-ended/4 differential inputs or 4 single-ended inputs
- 12-bit resolution
- Data transfer rate: 100 kHz
- Input voltage: 0-10 V, ± 10 V, 0-5 V, ± 5 V, 0-2 V, ± 2 V, 0-1 V, ± 1 V, 0-20 mA (Option) freely programmable through software for each channel
- Gain PGA x1, x2, x5, x10 freely programmable through software for each channel
- PCI-DMA for analog data acquisition

Analog acquisition

- Acquisition of one single channel, several channels, several channels through scan list
- Automatic analog acquisition through cyclic timer control
- Acquisition through scan list: up to 16 entries with gain, channel, unipolar/bipolar
- Acquisition triggered through software, timer, external event
- Trigger functions:
 - Software trigger or
 - external trigger: the analog acquisition (single or scan) is started through a signal switching from 0 to 24 V on digital input 0.
- Interrupt: end of single channel, end of multichannel, end of scan list.

Digital

- 4 digital inputs, 24 V, isolated
- 4 digital outputs, 24 V, isolated

Timer

- 24-bit, can be used as a cyclic time counter

Safety features

- Optical isolation 500 V min.
- Creeping distance IEC 61010-1 (VDE411-1)
- Overvoltage protection ± 12 V
- Protection against high-frequency EMI
- Input filter: 160 kHz
- Noise neutralization of the PC supply

CPCI-3001

16/8/4 single-ended or 8/4 differential inputs

12-bit resolution

100 kHz data transfer rate

Automatic analog acquisition

8 digital I/O, 24 V, isolated, timer

Trigger functions

Optical isolation 500 V, MTBF: 75,867 h at 45 °C

Graphical display of the measured data

EMC tested according to 89/336/EEC

- IEC 61326: electrical equipment for measurement, control and laboratory use

Applications

- Industrial process control
- Industrial measurement and monitoring
- Multichannel data acquisition
- Control of chemical processes
- Factory automation
- Acquisition of sensor data
- Labor instrumentation
- Current measurement
- Instrumentation

Software drivers

A CD-ROM with the following software and programming examples is supplied with the board.

Standard drivers for:

Linux kernel version 2.4.2;
Windows XP/2000/NT/98/95, MS-DOS.
Real-time driver for Windows XP/2000/NT/98/95.
Monitoring program ADDIMON

Drivers for the following application software:

LabVIEW 5.01

Samples for the following compilers:

Visual C++ 5.0
Microsoft C 6.0
Borland C++ 5.01
Borland C 3.1
Visual Basic 5.0
Delphi 4
Turbo Pascal 7.0

On request:

LabWindows/CVI • DIAdem 6/7 • DasyLab 6/7
Embedded NT

ADDIPACK functions on request:

Reduced write/read functions on input signals

Current driver list on the web: www.addi-data.com

Analog input board, isolated, 12-bit




CPCI-3001


Specifications

Analog inputs	
Number of inputs:	16 single-ended/8 differential inputs or 8 single-ended/4 differential inputs or 4 single-ended inputs
Resolution:	12-bit
Optical isolation:	500 V through optical couplers from the PC to the peripheral
Input ranges:	Software programmable for each channel 0-10 V, ± 10 V, 0-5 V, ± 5 V, 0-2 V, ± 2 V, 0-1 V, ± 1 V 0-20 mA optional
Data transfer rate:	100 kHz
Gain:	Software programmable (x1, x2, x5, x10)
Common mode rejection:	DC at 10 Hz, 90 dB minimum
Integral non-linearity (INL):	± 1 LSB
Diff. non linearity (DNL):	$\pm 1/2$ LSB
Input impedance (PGA):	$10^{12} \Omega // 10$ nF single-ended, $10^{12} \Omega // 20$ nF differential against GND
Band width (-3 dB):	limited to 159 kHz with low-pass filter
Trigger:	through software, timer, external event (24 V input)
Data transfer:	Data to the PC through FIFO memory, I/O-command, interrupt at EOC (End Of Conversion) and EOS (End of Scan), DMA transfer at EOC
Interrupts:	End of conversion, timer overrun, end of sequence
Timer	
Time base timer 2:	50 μ s; lowest programmable value: 100 μ s
Digital I/O	
Number of the I/O channels:	4 digital inputs, 4 digital outputs, 24 V
Optical isolation:	500 V through optical couplers from the PC to the peripheral
Input range:	0-30 V - logic "0": 0-5 V - logic "1": 10-30 V
Input current at 24 V:	3 mA typ.
Output range:	5-30 V
Max. switching current:	5 mA typ.
Output type:	Open collector
Noise immunity	
Test level:	- ESD: 4 kV - Fields: 10 V/m - Burst: 4 kV - Conducted radio interferences: 10 V
Physical and environmental conditions	
Dimensions:	3U/4TE
System bus:	CompactPCI 32-bit 5 V acc. to spec. 2.1 (PCISIG)
Place required:	1 slot for the analog inputs, 1 slot opening for digital I/O
Operating voltage:	+5 V, ± 5 % from PC
Current consumption:	670 mA typ.
Front connector:	37-pin SUB-D male connector
Additional connector:	16-pin male connector for ribbon cable for connecting the digital I/O
Temperature range:	0 to 60 °C (with forced cooling)

Simplified block diagram

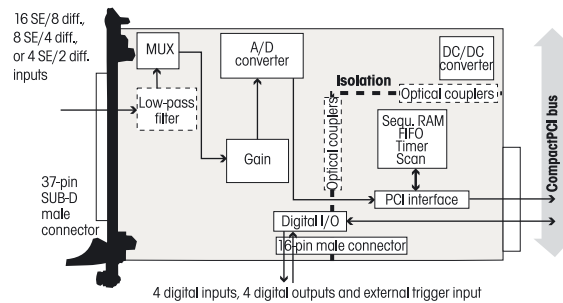

Pin assignment – 37-pin SUB-D male connector

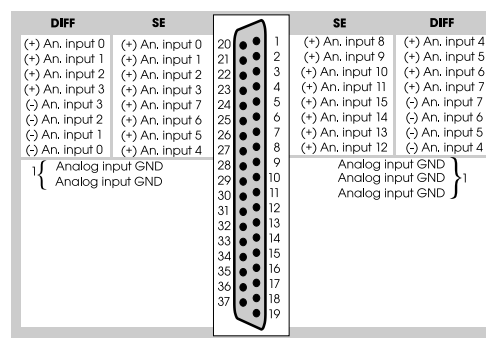


1: The analog inputs have a common ground line

16-pin male connector

Dig. output 0 (+)	1 ■■ 2	Dig. output 0 (-)
Dig. output 1 (+)	3 ■■ 4	Dig. output 1 (-)
Dig. output 2 (+)	5 ■■ 6	Dig. output 2 (-)
Dig. output 3 (+)	7 ■■ 8	Dig. output 3 (-)
Trigger/dig. input 0 (+)	9 ■■ 10	Trigger/dig. input 0 (-)
Dig. input 1 (+)	11 ■■ 12	Dig. input 1 (-)
Dig. input 2 (+)	13 ■■ 14	Dig. input 2 (-)
Dig. input 3 (+)	15 ■■ 16	Dig. input 3 (-)

ADDI-DATA connection

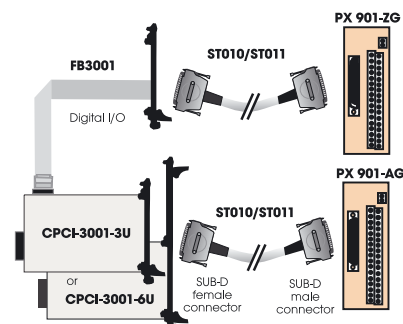

ORDERING INFORMATION

ADDIALOG CPCI-3001

CPCI-3001: Analog input board, isolated, 12-bit, 3U European size. Incl. technical description, software drivers and monitoring program

CPCI-3001-16 16 SE/8 diff. inputs

CPCI-3001-8 8 SE/4 diff. inputs

CPCI-3001-4 4 SE inputs

Options: Please specify the number of channels to be supplied with the required option.

URS-3001-6U: 6U bracket for mounting in a 6U housing

Option SF: Filter for 1 single-ended channel

Option DF: Precision filter for 1 differential channel (30 Hz)

Option SC: Current input for 1 single-ended channel 0(4)-20 mA

Option DC: Current input for 1 diff. channel, 0(4)-20 mA (30 Hz)

Zubehör

PX 901-A: Terminal board with transorb diodes and screw terminals for connecting the analog inputs

PX 901-AG: Same as PX 901-A with housing for DIN rail

PX 901-ZG: Terminal board with screw terminals for connecting the digital I/O for DIN rail

ST010: Standard round cable, shielded, twisted pairs, 2 m

ST011: Standard round cable, shielded, twisted pairs, 5 m

FB3001: Ribbon cable with 37-pin SUB-D male connector on 3U bracket for the dig. I/O

www.addi-data.com

Sales: +49(0)7223/9493-120

Fax: +49(0)7223/9493-92