


Screw terminal board for DIN rail

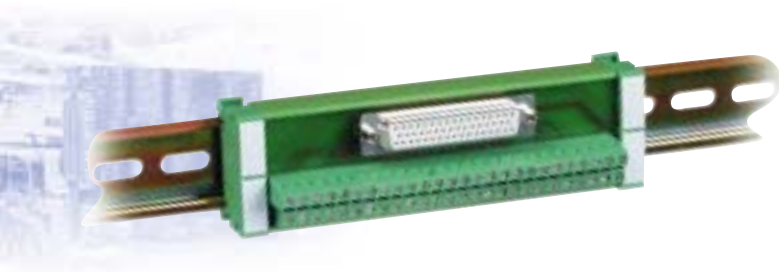

Features

- Screw terminal board for 50 signal lines
- The ground connection of the connector is lead directly to the connecting terminal
- With 50-pin female connector
- High packing density in the switch cabinet through small dimensions: 45 mm

PX 8000

Screw terminal board, for DIN rail

Connection of 50 signal lines

Side elements with labels

- For conducting cross section of 1.5 mm²
- I/O test voltage: 2.5 kV, 50 Hz, 60 s
- Operating temperature range: - 20 °C to + 50 °C
- Dimensions (L x W x H): 155 x 45, 42 mm
- DIN rail mounting
- Current/voltage: 2.5 A / 125 V

ADDIVARIOUS PX 8000

Screw terminal board, with housing for
DIN rail mounting.

Connection please order separately!

ST370-16: Standard round cable, shielded, twisted pairs, 2 m

ST8001: Cable for connecting APCI-8001 and OPMF 50-pin

ORDERING INFORMATION