

Product Information



Weller Handy Reel Lead-free Solder for Service and Repair


The new Weller Handy Reel with lead free solder wire is suited perfectly for service and repair on lead free soldered PCBs and electronic devices.

The ESD safe handy Reel facilitates the daily routine of soldering jobs. The solder is composed of Tin (Sn 96,5%), Silver (Ag3,0%) and Copper (Cu0,5%) and has an area of melting temperatures of 217-220 C°.

The single core of No-Clean-Flux achieves an optimum ability of wetting even at strongly oxidized components.

The content of halogen is less than 0,05 % and totally chlorine free. The highly efficient wetting agent was cleared of any water rests and contributes considerably to reduce tin and flux splatters.

The Weller Handy Reel is available in diameters of 0,5 mm and 1 mm.

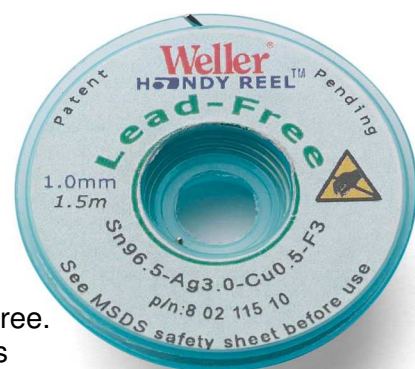

Order number

005 13 822 99

Description

Solder wire Ø 0,5 mm, length 4,0 m
Sn96,5 Ag3,0 Cu 0,5 F3 L1

005 13 823 99

Solder wire Ø 1,0 mm, length 1,5 m
Sn96,5 Ag3,0 Cu 0,5 F3 L1

For further information please contact:

Cooper Tools GmbH

Carl-Benz-Str. 2

74354 Besigheim, Germany

Tel.: (07143) 580-0

Fax: (07143) 580-108

E-Mail: info@coopertools.de