



**Wrap/Unwrap Tools, Bits, Stripping Tools**

**Wire-Wrap<sup>®</sup>**

Discontinuation of all products  
effective as from 30.06.2010

# Content

**Wrap/Unwrap Tools** 229 – 230

**Bits, Sleeves** 231 – 233

**Accessories** 234

**Stripping Tools** 235

**Spare Parts** 236

**Index** 264

# Wrap/Unwrap Tools

## Electronic Powered Tools for Wire-Wrap Applications – clockwise rotation

14YB3



Order No.	Model	Description
		<b>Heavy duty electrical Wire-Wrap tool</b>
0090293153	14YB3-230/A	Wire-Wrap tool, AWG 30–18, Conductor-Diameter 0,25–1,0 mm
0090293178	14YB3-230/C	Wire-Wrap tool, AWG 30–22, Conductor-Diameter 0,25–0,6 mm

14R3G



### Accessory

Model/Order No.	Description
990650WW	Charging unit without transformer

14HP1C



### Hand Squeezed Tools

Order No.	Model	Description
28000AC1	14HP1C	Wire-Wrap tool, clockwise rotation, AWG 30–22, Conductor-Diameter 0,25–0,65 mm
28010AB2	14HP1CLU	Wire-Wrap tool, counter clockwise rotation, AWG 30–22, Conductor-Diameter 0,25–0,65 mm

# Wrap/Unwrap Hand Tools

## Manual Wrapping Tools



Model/Order No.	Description
<b>WRAP3F30</b>	Universal Manual Wrapping Tool, AWG 30, Terminal 0,95 x 0,95
<b>WRAPECOMAXI</b>	Manual Wrapping Tool, AWG 20, Terminal max. 1,34 x 1,34
<b>WRAPECOMIDI</b>	Manual Wrapping Tool, AWG 26-22, Terminal max. 1,34 x 1,34
<b>WRAPECOMINI</b>	Manual Wrapping Tool, AWG 30-24, Terminal max. 0,95 x 0,95

## Manual Unwrapping Tools counter clockwise



Model/Order No.	Description
<b>509436</b>	Unwrap tool, AWG 32-26, Terminal 0,5 x 0,5
<b>505084</b>	Unwrap tool, AWG 32-26, Terminal 0,6 x 0,6
<b>509489</b>	Unwrap tool, AWG 30-24, Terminal 0,56 x 0,91
<b>504769</b>	Unwrap tool, AWG 26-20, Terminal 1,0 x 1,0 / 0,91 x 1,22
<b>515716</b>	Unwrap tool, AWG 26-20, Terminal 0,8 x 1,4 / 0,8 x 1,6

## Manual Unwrapping Tools clockwise/counter clockwise




Model/Order No.	Description
<b>505244</b>	Unwrap tool, AWG 32-26, Terminal 0,6 x 0,6
<b>A26664</b>	Unwrap tool, AWG 26-20, Terminal 1,0 x 1,0 / 0,91 x 1,22 / 0,8 x 1,4 / 0,8 x 1,6
<b>500130</b>	Unwrap tool, AWG 24-18, Terminal 1,14 x 1,14

## Unwrapping bit-sleeves assemblies clockwise rotation

Model/Order No.	Description
<b>990420</b>	Unwrap bit-sleeve assembly, AWG 30-36, outside diameter of bit 2,36 mm
<b>990421</b>	Unwrap bit-sleeve assembly, AWG 26-22, outside diameter of bit 3,18 mm

# Bits for Standard and Modified Connections

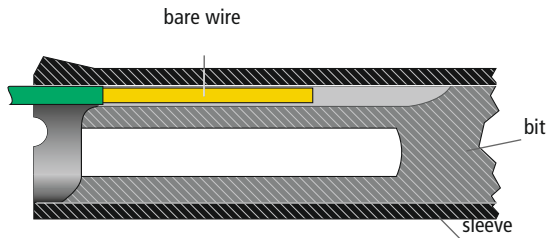


- For selection of bits and sleeves please use our Wire-Wrap catalogue

## Bits

Model/Order No.	Description	AWG	Terminal diagonal
26263	Wrap bit modified	24	1,37 x 1,86
26495	Wrap bit modified	20	1,07 x 1,86
501097	Wrap bit modified	30	0,67 x 0,77
502118	Wrap bit modified	26	1,35 x 1,76
502134	Wrap bit standard	24	0,61 x 1,10
504155	Wrap bit standard	24	1,25 x 1,74
504222	Wrap bit standard	18	1,55 x 1,86
504908	Wrap bit modified	18	1,55 x 1,86
504939	Wrap bit modified	22	1,25 x 1,86
505413	Wrap bit standard	22	1,25 x 1,86
505415	Wrap bit modified	24	0,61 x 1,10
506445	Wrap bit modified	26	0,59 x 0,98
506781	Wrap bit modified	26	1,60 x 1,86
506991	Wrap bit modified	24	1,19 x 1,69
507063	Wrap bit modified	30	0,78 x 0,87
507356	Wrap bit standard	20	1,07 x 1,68
507573	Wrap bit modified	30	0,84 x 0,92
508105	Wrap bit modified	30	1,35 x 1,45
509278	Wrap bit modified	28	0,78 x 0,87
509405	Wrap bit modified	26	0,87 x 1,28
511439	Wrap bit modified	26	1,22 x 1,42
512058	Wrap bit standard	24	1,38 x 1,88
519070	Wrap bit modified	24/26	1,37 x 1,88
519936	Wrap bit modified	30	0,79 x 0,95

# CSW Bits

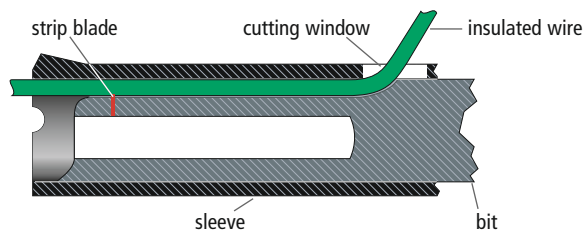


- Use our Wire-Wrap catalogue to select the bits and sleeves

## Bits

Model/Order No.	Description	AWG	Terminal diagonal
518910	CSW Wrap Bit	24	1,50 x 1,83
518931	CSW Wrap Bit	24-22	1,75 x 1,83
519066	CSW Wrap Bit	24	1,50 x 1,83
519926	CSW Wrap Bit	26	1,37 x 1,47
519928	CSW Wrap Bit	24	1,37 x 1,47
521105	CSW Wrap Bit	26	1,37 x 1,47
522202	CSW Wrap Bit	26	1,50 x 1,83
522203	CSW Wrap Bit	26	1,50 x 1,60
522211	CSW Wrap Bit	22	1,50 x 1,60
527812	CSW Wrap Bit	26	0,76 x 0,86
990561	CSW Wrap Bit	24	1,37 x 1,47
990563	CSW Wrap Bit	22	1,37 x 1,47
990579	CSW Wrap Bit	24	1,37 x 1,47
990646	CSW Wrap Bit	22	1,37 x 1,47
990681	CSW Wrap Bit	26	1,37 x 1,47
990753	CSW Wrap Bit	24	1,37 x 1,47
990764	CSW Wrap Bit	30	0,76 x 0,86
990846	CSW Wrap Bit	26	1,37 x 1,44
990995	CSW Wrap Bit	26	0,76 x 0,86
990996	CSW Wrap Bit	26-24	1,37 x 1,47
990063WW	CSW Wrap Bit	30	0,76 x 0,86

# Sleeves

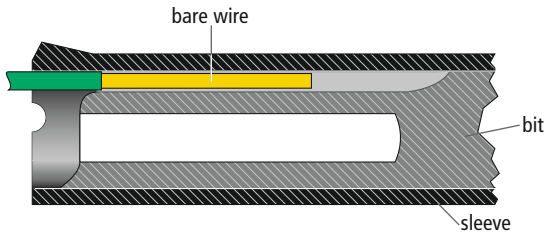

- Use our Wire-Wrap catalogue to select the bits and sleeves

## Sleeves for Standard and Modified Connections

Model/Order No.	Description
18640	Wrap sleeve
18840	Wrap sleeve
26245	Wrap sleeve
502129	Wrap sleeve
506999	Wrap sleeve
507100	Wrap sleeve
512056	Wrap sleeve
517228	Wrap sleeve

## Sleeves CSW for Modified Connections

Model/Order No.	Description
518911	Cut-Strip-Wrap Sleeve
518932	Cut-Strip-Wrap Sleeve
519067	Cut-Strip-Wrap Sleeve
519927	Cut-Strip-Wrap Sleeve
519929	Cut-Strip-Wrap Sleeve
521116	Cut-Strip-Wrap Sleeve
522201	Cut-Strip-Wrap Sleeve
522204	Cut-Strip-Wrap Sleeve
522212	Cut-Strip-Wrap Sleeve
527813	Cut-Strip-Wrap Sleeve
990435	Cut-Strip-Wrap Sleeve
990562	Cut-Strip-Wrap Sleeve
990765	Cut-Strip-Wrap Sleeve
990847	Cut-Strip-Wrap Sleeve
990064WW	Cut-Strip-Wrap Sleeve

# Accessories

## Tool Box



Model/Order No.	Description
0090000013	Tool Box empty for 14YB3 Wire-Wrap tool, dimension: 330 x 240 x 85 mm

## Strip Force Gauge



Model/Order No.	Description
0090912968	Strip Force Gauge. Spring gauge with dial, range 10 kg (N100), Scale Division 100 g/N1-370 g
0090914414	Spring Hook midi
0090914415	Spring Hook mini

# Stripping tools

## Stripping tools

- Special stripping tools made of high grade tool steel
- Anti-glare finish
- High precision and EGB-safe
- For strip Wire-Wrap wires

### Front Stripping – high grade tool steel, ESD safe

Model/Order No.	Description
510AE	Front stripping tool, adjustable AWG 30–18 (0,25–1,02 mm), 120 mm, 75 g



552E	Front stripping tool, high precision, adjustable AWG 42–24 (0,06–0,60 mm), 120 mm, 80 g
------	---



### Side Stripping – high grade tool steel, ESD safe

Model/Order No.	Description
552S	Side stripping tool, high precision, adjustable AWG 42–24 (0,06–0,60 mm), 120 mm, 80 g

